

# GEM Series



**Stereozoom Microscopes For Gemology** 

### **GEM** Series

As a leading company in the supply of gemological microscopes, OPTIKA offers a series of microscopes purposely designed for this sector by using both brightfield and darkfield methods OPTIGEM-10 and OPTIGEM-20. This series has been designed and manufactured in order to satisfy the requests of a very demanding industry; brightfield/darkfield, immersion analysis, light color temperature: no detail has been left to chance.

### **Specifically Designed for Specialists**

Gemological stereomicroscopes are meant to help with stone inspection. Jewels and gems have a variety of grades (or quality levels), which ultimately influence their value and cost on the market; therefore it is important to have solutions that are purposely designed for gemology. These stereomicroscopes are equipped with iris and darkfield condenser on the bottom light source, and with a set of on stage tweezers to hold the stone in place.

#### **Much More Than Gemological Stereomicroscopes**

**OPTIGEM-10 & OPTIGEM-20** are two-in-one gemology instruments that can be used both in vertical and horizontal position in a very easy way, just by turning one knob (no disassembling and re-assembling operations are required). The horizontal position extends the use of a gemological microscope, giving the possibility to perform immersion analysis by submerging a sample in liquid. If the stone's refractive index is close to the liquid's one, immersion makes the interior more visible by reducing the effects of refraction and surface reflection. This enables you to see a gem's inclusions or color distribution more easily.

Immersion is also necessary to see crystal growth structures, which might help you separate natural from synthetic corundum. Features like curved growth striae in flame-fusion synthetics, or separation planes in assembled stones, are often far easier to see when the stone is immersed.



Vertical position for standard gem analysis with darkfield illumination and polarizing tecnique



Horizontal position for immersion gem analysis

### **Incredibly Versatile Operations**

**OPTIGEM Series** offers multiple options for illumination and contrast techniques, such as incident, transmitted and oblique brightfield darkfield, polarization and immersion analysis only on Optigem 10 & 20. They come with a special optical condenser configuration to ensure real, perfect darkfield application (see the dedicated chapter for further information).

### Stereozoom Microscopes For Gemology

### **Ultrabright LED Condenser for Optimized Illumination**

An ultrabright LED-based electronic condenser with intensity control allows to switch from brightfield to darkfield; it also produces perfectly the colour of daylight.

The condenser uses a new optical configuration especially created in order to obtain a perfect darkfield application.

With darkfield observation, the unscattered beams from the image are excluded: as a result, the field around the specimen is generally dark.

An additional flexible arm and velvet-field slider produce extra contrast for crisp and vibrant images. The illumination of OPTIGEM microscopes is greatly performing and this brings this series to be ideal for precious stones and jewels evaluation.



### Get the most out of our accessories



ST-202 - Polarizing analysis kit

Polarization technique allows to quickly determine if the stone at hand is isotropic or anisotropic or, at best, to determine the optic character of gemstones (twin planes, strain, pleochroism, etc.). It is also the preferred tool for separating synthetic Quartz from its natural counterparts. In addition, the polarizing microscope may be very useful for distinguishing solid inclusions from negative inclusions as well as for spotting polysynthetic twinning.


### **Applications**


Some application examples demonstrating the performance of OPTIGEM Series, especially designed to observe samples of precious stones and jewels and provided with specific features for gemological needs.


### Legend

- 1. Inspection of stones with OPTIGEM-10.
- 2. Inspection of stones with pure white darkfield illumination.
- 3. Immersion cell (ST-203) on a translating support (ST-204).
- 4. Sample of Citrine.
- 5. ST-201 accessory creates a soft darkfield illumination ideal for diamond analysis.
- 6. Optigem can be easily rotated to a horizontal working position.
- 7. ST-201 accessory for analysis under polarized light.
- 8. Working with Optigem and its accessories (they can be stacked for increased functionality).


### **GEM** Series

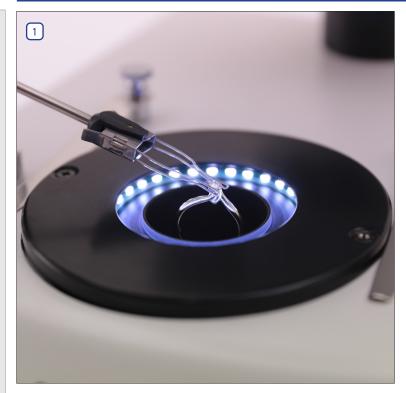

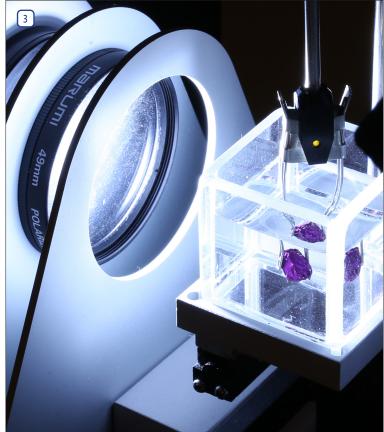

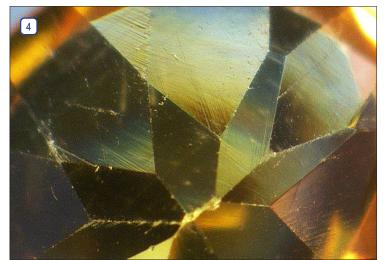



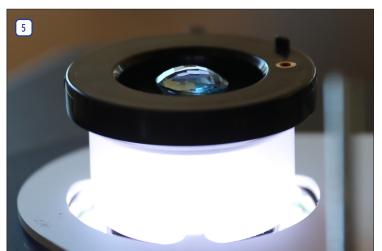





## **GEM** Series - **OPTIGEM10** model

Binocular gemological stereomicroscopes for brightfield and darkfield applications with special side-emitting **LED** illumination ring for true darkfield illumination. Equipped also with **4 incident LED** flexible arm and a diffusive **LED** disc for transmitted illumination. The instrument can be easily tilted horizontally for immersion analysis.



















| Part                     | Description  |
|--------------------------|--|
| <b>Observation mode:</b> | Brightfield, darkfield.  |
| Heads                    | Binocular, 45° inclined, 360° rotating.  |
| Interpupillary distance: | Adjustable between 51 and 75 mm  |
| Dioptric adjustment:     | On both eyepiece tubes.  |
| Eyepieces:               | WF10x/21 mm, high eye-point.   |
| Objective:               | Parfocal achromatic zoom 0.7x4.5x (zoom factor 6.43:1).  |
| Working distance:        | 100 mm   |
| Specimen stage:          | Gemological stage, with clamp for holding gems.  |
| Focusing:                | Rack and pinion mechanism controlled by a pair of knobs.   |
| Stand:                   | Fixed arm stand with tilting system (with position lock control). It can be totally overturned and rotated allowing in this way to obtain a 2-in-one instrument: an instrument for standard observations and one for observation of water-immersed gems. |

| Part                           | Description   |  |  |
|--------------------------------|---|--|--|
| Darkfield illumination:        | Equipped with a state-of-the-art illuminator for darkfield observation. It consist of an innovative side-emmiting LEDs ring with an emission angle of 38°. With brightness control. |  |  |
| Transmitted light llumination: | Equipped with a LED illuminator, located under the stage. With brightness control.  |  |  |
| Incident illumination:         | Equipped with a flexible gooseneck-arm 4-LED illuminator. With brightness control.  |  |  |
| Color temperature:             | Pure white 6,300 K  |  |  |

## **GEM** Series - **OPTIGEM20** model

Trinocular gemological stereomicroscopes for brightfield and darkfield applications with special side-emitting **LED** illumination ring for true darkfield illumination. Equipped also with **4 incident LED** flexible arm and a diffusive **LED** disc for transmitted illumination. The instrument can be easily tilted horizontally for immersion analysis.



















| Part                     | Description  |
|--------------------------|--|
| Observation mode:        | Brightfield, darkfield.  |
| Heads                    | Trnocular, 45° inclined, 360° rotating.  |
| Interpupillary distance: | Adjustable between 51 and 75 mm  |
| Dioptric adjustment:     | On both eyepiece tubes.  |
| Eyepieces:               | WF10x/21 mm, high eye-point.   |
| Objective:               | Parfocal achromatic zoom 0.7x4.5x (zoom factor 6.43:1).  |
| Working distance:        | 100 mm   |
| Specimen stage:          | Gemological stage, with clamp for holding gems.  |
| Focusing:                | Rack and pinion mechanism controlled by a pair of knobs.   |
| Stand:                   | Fixed arm stand with tilting system (with position lock control). It can be totally overturned and rotated allowing in this way to obtain a 2-in-one instrument: an instrument for standard observations and one for observation of water-immersed gems. |

| Part                           | Description   |
|--------------------------------|---|
| Darkfield illumination:        | Equipped with a state-of-the-art illuminator for darkfield observation. It consist of an innovative side-emmiting LEDs ring with an emission angle of 38°. With brightness control. |
| Transmitted light llumination: | Equipped with a LED illuminator, located under the stage. With brightness control.  |
| Incident illumination:         | Equipped with a flexible gooseneck-arm 4-LED illuminator. With brightness control.  |
| Color temperature:             | Pure white 6,300 K  |

## **GEM** Series - Comparison chart


| Model      | Head  | Eyepieces              | Objective         | Stand   | Illumination  |
|------------|---|------------------------|-------------------|---|---|
| OPTIGEM-10 |   |                        | Gemological stand | Incident illumination: 4 LED flexible arm with brightness adjustment.  Transmitted illumination: Diffusive LED disc for observation in brightfield and side-emitting LED ring for observation in darkfield. |   |
| OPTIGEM-20 | Trinocular,<br>360° rotating,<br>45° inclined | Wide Field<br>10x/21mm | 0.7 4.5x<br>Zoom  | Gemological stand   | Incident illumination: 4 LED flexible arm with brightness adjustment.  Transmitted illumination: Diffusive LED disc for observation in brightfield and side-emitting LED ring for observation in darkfield. |

## **GEM** Series - Optical Performance

### **OPTIGEM-10 / OPTIGEM-20 - Optical performance**

| Eyepiece            | 10x (ST-081)        |                    | 15x (ST-082)        |                    | 20x (ST-083)        |                    |  |
|---------------------|---------------------|--------------------|---------------------|--------------------|---------------------|--------------------|--|
| Field number (mm)   | 21                  |                    | 15                  |                    | 10                  |                    |  |
| Objective           | Total magnification | Field of View (mm) | Total magnification | Field of View (mm) | Total magnification | Field of View (mm) |  |
| 0.5x (W.D. 165 mm)  | 3.5x-22.5x          | 60.00-9.23         | 5.25x-33.75x        | 42.86-6.67         | 7x-45x              | 28.57-4.44         |  |
| 0.75x (W.D. 117 mm) | 5.25x-33.75x        | 40.00-6.22         | 7.875x-50.625x      | 28.57-4.44         | 10.50x-67.5x        | 19.05-2.96         |  |
| 1x (W.D. 100 mm)    | 7x-45x              | 30.00-4.66         | 10.5x-67.5x         | 21.43-3.33         | 14x-90x             | 14.29-2.22         |  |
| 1.5x (W.D. 47 mm)   | 10.50x-67.5x        | 20.00-3.11         | 15.75x-101.25x      | 14.29-2.22         | 21x-135x            | 9.52-1.48          |  |
| 2x (W.D. 33 mm)     | 14x-90x             | 15.00-2.33         | 21x-135x            | 10.71-1.67         | 28x-180x            | 7.14-1.11          |  |

### **GEM** Series - Contrast method comparison

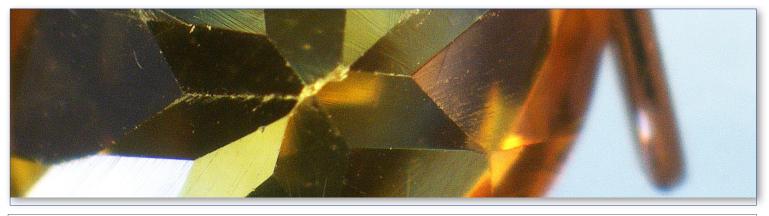

Citrine - OPTIGEM-20 - 0.7x zoom - Brightfield



Citrine - OPTIGEM-20 - 0.7x zoom - Darkfield

### **GEM** Series - Accessories

#### **Eyecups & Eyepieces**

| ST-081 | FW10x/21 | evenieces ( | (pair), hid | thiograph dr | with rubber cup |
|--------|----------|-------------|-------------|--------------|-----------------|
|        |          |             |             |              |                 |

ST-082 WF15x/15 eyepieces (pair), high eyepoint

ST-083 WF20x/10 eyepieces (pair), high eyepoint

ST-084 WF10x/21 micrometric eyepiece, high eyepoint, with rubber cup

#### **Additional Lenses**

| ST-086 | Additional | lens 1.5 | x (w.d. | 45mm) |
|--------|------------|----------|---------|-------|
| ST-087 | Additional |          |         |       |

#### **Condenser & Filters**

ST-202 Polarizing analisys kit

### **Camera Adapters**

|  | 13.1 |  |  |  |              |
|--|------|--|--|--|--------------|
|  |      |  |  |  | microscopes) |
|  |      |  |  |  |              |
|  |      |  |  |  |              |
|  |      |  |  |  |              |
|  |      |  |  |  |              |

M-115 0.35x C-Mount projection lens M-114 0.5x C-Mount projection lens

M-118 0.75x C-Mount projection lens

M-173 C-Mount projection lens for APS-C/full frame reflex cameras (trino)

M-699 Universal adapter for C-Mount projection lens (trino)

M-620 0.35x focusable C-Mount adapter

M-620.1 0.5x focusable C-Mount adapter

M-620.2 0.65x focusable C-Mount adapter

M-620.3 1x focusable C-Mount adapter

#### Miscellaneous

| 1 | <b>E</b> 1 | 104 | Clear | nina  | Li+ |
|---|------------|-----|-------|-------|-----|
| ı | וכו        | 104 | Clear | IIIIu | ΚIL |

DC-002 Plastic dust cover, medium, 490(l)x490(h) mm

M-005 Micrometric slide, 26x76mm, with 2 scales (1mm/100 & 10mm/100)

ST-092 Protective glass for stereohead

ST-201 Iris aperture diaphragm for darkfield

ST-203 Glass immersion cell

ST-204 Translating cell holder

ST-205 Vacuum pick-up (with electric vacuum pump)

ST-207 Iris aperture diaphragm for brightfield

AB-030 Antibacterial surface treatment, only for newly purchased microscope





How to connect the cameras to our microscopes.

Please refer to the Adapter reference list on Digital section.



Inspection & Industrial

 $v\,6.8.0\,-\,OPTIKA\,reserves\,the\,right\,to\,make\,corrections, modifications, enhancements, improvements\,and\,other\,changes\,to\,its\,products\,at\,any\,time\,without\,notice.$ 

### **Headquarters and Manufacturing Facilities**

**OPTIKA**° **S.r.I.** Via Rigla, 30 - 24010 Ponteranica (BG) - ITALY - Tel.: +39 035.571.392 - info@optikamicroscopes.com

**Optika Sales branches** 

OPTIKA° Spain OPTIKA° China OPTIKA° India spain@optikamicroscopes.com china@optikamicroscopes.com india@optikamicroscopes.com **OPTIKA**° USA **OPTIKA**° Central America

usa@optikamicroscopes.com camerica@optikamicroscopes.com